

PRODUCT INFORMATION

Trade Name	Søuld Acoustic Mats FR
Supplier	Søuld ApS
Product Type	Acoustic absorbent; Flame retardant
Application	Interior wall or ceiling claddings
Mounting	Adhesive or screws

COMPOSITION OF INGREDIENTS

Ingredients	Function	Supplier	Origin
Eelgrass	Matrix	Farmers	Denmark
Flame retardant	Fire protection	Burnblock	Denmark
Bi-component fibre	Binder	Fibervision	Denmark

CE MARKING AND ETA

European standard	EAD 040005-00-1201	Factory-made thermal and/or acoustic insulation products made of vegetable or animal fibers
-------------------	--------------------	---

DIMENSIONS AND DENSITY


Parameter	Thickness [mm]	Length [mm]	Width [mm]	Density [kg/ m ³]
Standard size	35	1100	600	137
Custom size	35	≤ 1100	≤ 3000	137
Tolerances	-3/+8 %	± 2,0 %	± 1,5 %	± 10 %

Søuld Acoustic Mats FR are made using a natural material. Therefore, minor variations in the mats moisture content and dimensions may occur. Depending on the relative air humidity and temperature, the material expands and contracts continuously. Minor variations should be accepted as the Acoustic Mats respond to changing indoor conditions throughout the seasons. It is important to follow Søuld's instructions for product installation, storage and acclimatisation to achieve optimal results.

ACOUSTIC PERFORMANCE

DS/EN ISO 354, DS/EN ISO 11654

Installation Method	aw	NRC	SAA	Class
Direct mounted on concrete wall/ceiling	00 mm air gap 0,85	0,90	0,88	B(MH)
Air slot between Concrete Wall and Acoustic Mat	12 mm air gap 0,95	0,90	0,93	A

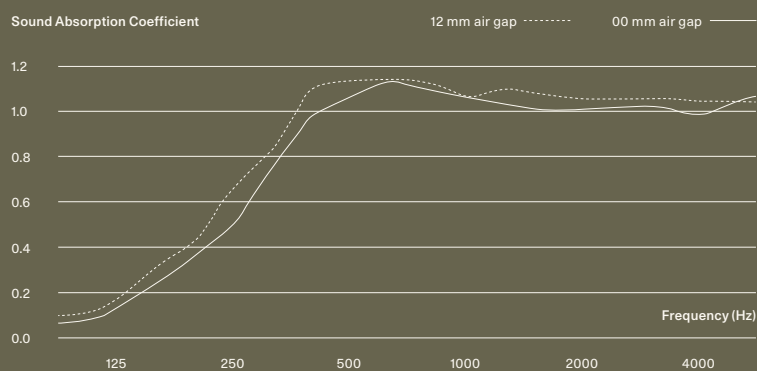

REACTION TO FIRE

Installation Guide	Installation Method	Standard	Class
See sould.dk	Glued	EN 13501-1	D-s1,d1
See sould.dk	Glued / Screwed	EN 13501-1	C-s1,d1 Only for custom orders

DANISH INDOOR CLIMATE LABEL

DICL CRITERIA

Parameter	Unit	Time	Result	DICL criteria	Evaluation
TVOC	[mg/m ³]	28 days	0,140	≤ 1,0	Pass
Formaldehyde	[µg/m ³]	28 days	< 0,005	≤ 1,0	Pass
CMR compounds	[mg/m ³]	28 days	< 0,001	< 0,001	Pass
Odour acceptability	n.a.	29 days	-	-	-
Particle emission	[mg/m ³]	adv. of 3 & 15 hours	0,28	≤ 0,75	Low

CRADLE TO CRADLE

VERSION 3.1

Cradle to Cradle Certified®	Gold level
Material Health Certificate™	Platinum level

EPD (ENVIRONMENTAL PRODUCT DECLARATION)

ISO 14025/EN 15804

Parameter	Unit	A1: Raw material	A2: Transport	A3: Manufacturing	A1-A3: Sum
GWP - Total	[kg CO ₂ -eq/m ²]	-2,7	0,2	0,8	-1,8
GWP - Fossil	[kg CO ₂ -eq/m ²]	1,9	0,2	0,7	2,8
GWP - Biogenic	[kg CO ₂ -eq/m ²]	-4,6	0,0	0,1	-4,5
GWP - Luluc	[kg CO ₂ -eq/m ²]	0,0	0,0	0,0	0,0

PRODUCTION & RECYCLABILITY

Production location	Thisted, Denmark
Waste in production	Can be recycled
Recyclability	Recyclable

APPEARANCE AND ODOUR

Color	Warm browns
Odour	Subtle wind and sea

Søuld Acoustic Mats FR are made from a natural material with no additional dyes. Therefore, slight colour and structure variations may occur. If consistent colour and structure matching is required for the installation, please use products from the same pallet or the same production batch. All mats will be delivered untreated - without a sealing. That's to keep the natural characteristics of the eelgrass regarding scent, haptics and optics alive. The ageing of the surfaces through UV-light is a natural process. Please note that newly manufactured and freshly cut Acoustic Mats will impart a subtle, natural scent of the sea which decreases over time.

PRODUCT INFORMATION

Trade Name	Søuld Acoustic Mats
Supplier	Søuld ApS
Product Type	Acoustic absorbent: Non-flame retardant
Application	Interior acoustic panels
Mounting	Adhesive, screws or mechanical fixtures

COMPOSITION OF INGREDIENTS

Ingredients	Function	Supplier	Origin
Eelgrass	Matrix	Farmers	Denmark
Bi-component fibre	Binder	Fibervision	Denmark

DIMENSIONS AND DENSITY

Parameter	Thickness [mm]	Length [mm]	Width [mm]	Density [kg/ m ³]
Standard size	40	1100	600	120
Custom size	40	≤ 1100	≤ 3000	120
Tolerances	-3/+8 %	± 2,0 %	± 1,5 %	± 10 %


Søuld Acoustic Mats are made using a natural material. Therefore, minor variations in the mats moisture content and dimensions may occur. Depending on the relative air humidity and temperature, the material expands and contracts continuously. Minor variations should be accepted as the Acoustic Mats respond to changing indoor conditions throughout the seasons. It is important to follow Søuld's instructions for product installation, storage and acclimatisation to achieve optimal results.

ACOUSTIC PERFORMANCE

DS/EN ISO 354, DS/EN ISO 11654

Installation Method	aw	NRC	SAA	Class	
Direct mounted on concrete wall/ceiling	0 mm air gap	0,95	0,90	0,92	A

Sound Absorption Coefficient

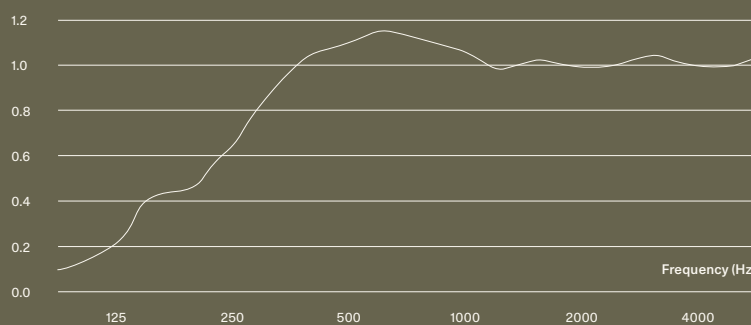

REACTION TO FIRE

EN 13501-1

Installation Method	Standard	Class
No reaction to fire performances are determined.		

DANISH INDOOR CLIMATE LABEL

DICL CRITERIA

Parameter	Unit	Time	Result	DICL criteria	Evaluation
TVOC	[mg/m ³]	28 days	0.140	≤ 1.0	Pass
Formaldehyde	[µg/m ³]	28 days	< 0.005	≤ 1.0	Pass
CMR compounds	[mg/m ³]	28 days	< 0.001	< 0.001	Pass
Odour acceptability	n.a.	29 days	-	-	-
Particle emission	[mg/m ²]	adv. of 3 & 15 hours	0.28	≤ 0.75	Low

CRADLE TO CRADLE

VERSION 3.1

Cradle to Cradle Certified®	Gold level
Material Health Certificate™	Platinum level

EPD (ENVIRONMENTAL PRODUCT DECLARATION)

ISO 14025/EN 15804

Parameter	Unit	A1: Raw material	A2: Transport	A3: Manufacturing	A1-A3: Sum
GWP – Total	[kg CO ₂ -eq/m ²]	-4,3	0,2	0,5	-3,6
GWP – Fossil	[kg CO ₂ -eq/m ²]	1,5	0,2	0,4	2,0
GWP – Biogenic	[kg CO ₂ -eq/m ²]	-5,7	0,0	0,1	-5,6
GWP – Luluc	[kg CO ₂ -eq/m ²]	0.0	0.0	0.0	0.0

PRODUCTION & RECYCLABILITY

Production location	Thisted, Denmark
Waste in production	Can be recycled
Recyclability	100% recyclable

APPEARANCE AND ODOUR

Odour	Subtle wind and sea
Color	Muted greens/warm browns

Søuld Acoustic Mats are made from a natural material with no additional dyes. Therefore, slight colour and structure variations may occur. If consistent colour and structure matching is required for the installation, please use products from the same pallet or the same production batch. All mats will be delivered untreated - without a sealing. That's to keep the natural characteristics of the eelgrass regarding scent, haptics and optics alive. The ageing of the surfaces through UV-light is a natural process. Please note that newly manufactured and freshly cut Acoustic Mats will impart a subtle, natural scent of the sea which decreases over time.

PRODUCT INFORMATION

Trade Name	Søuld Acoustic Boards
Supplier	Søuld ApS
Product Type	Acoustic absorbent: Non-flame retardant
Application	Interior acoustic panels
Mounting	Adhesive, screws or mechanical fixtures

COMPOSITION OF INGREDIENTS

Ingredients	Function	Supplier	Origin
Eelgrass	Matrix	Farmers	Denmark
Bi-component fibre	Binder	Fibervision	Denmark

DIMENSIONS AND DENSITY

Parameter	Thickness [mm]	Length [mm]	Width [mm]	Density [kg/ m ³]
Standard size	18	1100	600	266
Custom size	18	≤ 1100	≤ 3000	266
Tolerances	-3/+8 %	± 2,0 %	± 1,5 %	± 10 %


Søuld Acoustic Boards are made using a natural material. Therefore, minor variations in the mats moisture content and dimensions may occur. Depending on the relative air humidity and temperature, the material expands and contracts continuously. Minor variations should be accepted as the Acoustic Boards respond to changing indoor conditions throughout the seasons. It is important to follow Søuld's instructions for product installation, storage and acclimatisation to achieve optimal results.

ACOUSTIC PERFORMANCE

ASTM C423-17 & INDICATIVE ISO 11654

Installation Method	aw	NRC	SAA	Class	
Direct mounted on concrete wall/ceiling	0 mm air gap	-	0,65	0,63	Indicative C

Sound Absorption Coefficient

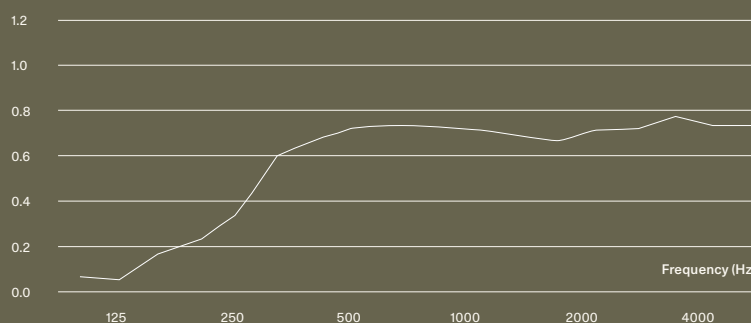

REACTION TO FIRE

Installation Guide	Installation Method	Standard	Class
-	Unadhered	ASTM E84	Class III or C rating

EPD (ENVIRONMENTAL PRODUCT DECLARATION)

ISO 14025/EN 15804

Parameter	Unit	A1: Raw material	A2: Transport	A3: Manufacturing	A1-A3: Sum
GWP - Total	[kg CO ₂ -eq/m ²]	-4,3	0,2	0,5	-3,6
GWP - Fossil	[kg CO ₂ -eq/m ²]	1,5	0,2	0,4	2,0
GWP - Biogenic	[kg CO ₂ -eq/m ²]	-5,7	0,0	0,1	-5,6
GWP - Luluc	[kg CO ₂ -eq/m ²]	0,0	0,0	0,0	0,0

CRADLE TO CRADLE

VERSION 3.1

Cradle to Cradle Certified®	Gold level
Material Health Certificate™	Platinum level

PRODUCTION & RECYCLABILITY

Production location	Thisted, Denmark
Waste in production	Can be recycled
Recyclability	100% recyclable

APPEARANCE AND ODOUR

Odour	Subtle wind and sea
Color	Light Warm browns

Søuld Acoustic Mats are made from a natural material with no additional dyes. Therefore, slight colour and structure variations may occur. If consistent colour and structure matching is required for the installation, please use products from the same pallet or the same production batch. All mats will be delivered untreated - without a sealing. That's to keep the natural characteristics of the eelgrass regarding scent, haptics and optics alive. The ageing of the surfaces through UV-light is a natural process. Please note that newly manufactured and freshly cut Acoustic Mats will impart a subtle, natural scent of the sea which decreases over time.

PRODUCT INFORMATION

Trade Name	Søuld Acoustic Boards FR
Supplier	Søuld ApS
Product Type	Acoustic absorbent: Flame Retardant
Application	Interior acoustic panels
Mounting	Adhesive, screws or mechanical fixtures

COMPOSITION OF INGREDIENTS

Ingredients	Function	Supplier	Origin
Eelgrass	Matrix	Farmers	Denmark
Flame retardant	Fire protection	Burnblock	Denmark
Bi-component fibre	Binder	Fibervision	Denmark

DIMENSIONS AND DENSITY

Parameter	Thickness [mm]	Length [mm]	Width [mm]	Density [kg / m ³]
Standard size	18	1100	600	266
Custom size	18	≤ 1100	≤ 3000	266
Tolerances	-3/+8 %	± 2,0 %	± 1,5 %	± 10 %


Søuld Acoustic Boards are made using a natural material. Therefore, minor variations in the mats moisture content and dimensions may occur. Depending on the relative air humidity and temperature, the material expands and contracts continuously. Minor variations should be accepted as the Acoustic Boards respond to changing indoor conditions throughout the seasons. It is important to follow Søuld's instructions for product installation, storage and acclimatisation to achieve optimal results.

ACOUSTIC PERFORMANCE

ASTM C423-17 & INDICATIVE ISO 11654

Installation Method	aw	NRC	SAA	Class	
Direct mounted on concrete wall/ceiling	0 mm air gap	-	0,65	0,63	Indicative C

Sound Absorption Coefficient

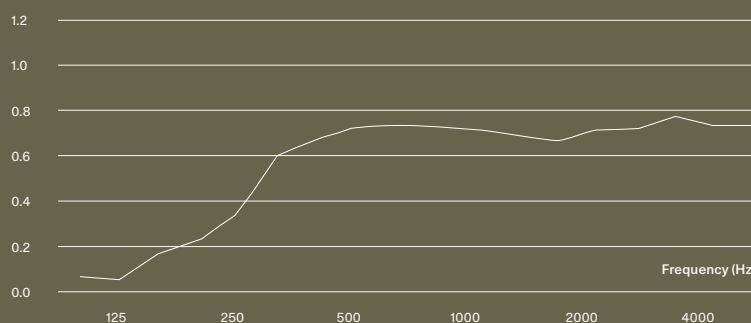

REACTION TO FIRE

Installation Guide	Installation Method	Standard	Class
See sould.dk	Glued	EN 13501-1	D-s1,d2
-	Unadhered	ASTM E84	Class I or A rating

EPD (ENVIRONMENTAL PRODUCT DECLARATION)

ISO 14025/EN 15804

Parameter	Unit	A1: Raw material	A2: Transport	A3: Manufacturing	A1-A3: Sum
GWP – Total	[kg CO ₂ -eq/m ²]	-2,7	0,2	0,8	-1,8
GWP – Fossil	[kg CO ₂ -eq/m ²]	1,9	0,2	0,7	2,8
GWP – Biogenic	[kg CO ₂ -eq/m ²]	-4,6	0,0	0,1	-4,5
GWP – Luluc	[kg CO ₂ -eq/m ²]	0,0	0,0	0,0	0,0

CRADLE TO CRADLE

VERSION 3.1

Cradle to Cradle Certified®	Gold level
Material Health Certificate™	Platinum level

PRODUCTION & RECYCLABILITY

Production location	Thisted, Denmark
Waste in production	Can be recycled
Recyclability	Recyclable

APPEARANCE AND ODOUR

Color	Bright Warm Brown
Odour	Subtle wind and sea

Søuld Acoustic Boards FR are made from a natural material with no additional dyes. Therefore, slight colour and structure variations may occur. If consistent colour and structure matching is required for the installation, please use products from the same pallet or the same production batch. All mats will be delivered untreated - without a sealing. That's to keep the natural characteristics of the eelgrass regarding scent, haptics and optics alive. The ageing of the surfaces through UV-light is a natural process. Please note that newly manufactured and freshly cut Acoustic Mats will impart a subtle, natural scent of the sea which decreases over time.